



Super Liquid Release Agent TECHNICAL DATA

Description: SUPER LIQUID RELEASE AGENT™ is a concentrated form release agent specially formulated for use with Urethane Stamping mats. SUPER LIQUID RELEASE AGENT™ acts as a parting agent between plastic concrete and concrete stamping mats. SUPER LIQUID RELEASE AGENT™ also prolongs the life of stamping mats by decreasing the friction between the Stamps and the concrete surface.

Uses: SUPER LIQUID RELEASE AGENT™ is designed for use with Urethane Stamping Mats, it is compatible with Stamped concrete applications and polymer modified overlays.

Compatibility: This product is specifically designed for use ONLY WITH Mineral Spirits OR Odorless Mineral Spirits OR VM&P Naphtha. CAUTION TO THE CONSUMER: DO NOT USE PRODUCTS CLAIMING "MADE WITH MINERAL SPIRITS" USE ONLY PURE MINERAL SPIRITS! DO NOT USE PAINT THINNER!

Coverage: When adequately mixed with Mineral Spirits, SUPER LIQUID RELEASE AGENT™ will yield coverage of 200 to 300 sq ft per Gallon or 1000 to 1500 sq ft per 5 Gallon. The coverage rate of SUPER LIQUID RELEASE AGENT™ is directly related to both the surface and ambient temperatures.

Warmer = Less Coverage Rate

Colder = Greater Coverage Rate

Packaging: SUPER LIQUID RELEASE AGENT™ is available in 8 oz bottles, for use with 5 gallons of Mineral Spirits. A case of 4 – 8oz bottles is also available.

Mixing:

1. FIRST CAREFULLY READ ALL INFORMATION AND INSTRUCTIONS ON MINERAL SPIRITS CONTAINER!
2. PUT ON CHEMICAL RESISTANT OR NEOPRENE GLOVES AND ADEQUATE EYE PROTECTION AND MOVE TO AN ADEQUATELY VENTILATED AREA.
3. Begin by pouring the entire contents of the 8oz SUPER LIQUID RELEASE AGENT™ into the 5 gallon Mineral Spirits container.
4. Replace the cap to the SUPER LIQUID RELEASE AGENT™ container and discard according to local, state and federal laws.
5. Next, replace the lid on the 5 gallon container, make sure container is sealed properly. Shake or stir product for 30 seconds. Use CAUTION when opening the container after shaking, some containers maybe under pressure, and can cause injury or bodily harm.
6. Your SUPER LIQUID RELEASE AGENT™ is now adequately dispersed within the Mineral Spirits and ready for use.

Application:

Using a pump type sprayer, liberally spray a mist of SUPER LIQUID RELEASE AGENT™ on BOTH the concrete(or polymer modified overlay) where you are going to place the next few texturing mats as well as the texture mats themselves. DO NOT apply to an area greater than 10 to 15 sqft as the SUPER LIQUID RELEASE AGENT™ may evaporate before the mats are placed over it. Texturing Mats will require additional application throughout use to ensure an adequate release is obtained throughout the project.

Clean Up:

No removal of Liquid Release is necessary from the concrete surface or polymer modified overlay.

When the texturing is completed, wash off the SUPER LIQUID RELEASE AGENT™ from the texturing mats using mild soap and pure water.

Limitations:

To maintain the integrity of the concrete surface, do not trowel or in any way mix the SUPER LIQUID RELEASE AGENT™ with the surface. To make corrections on the plastic concrete surface, use a texturing mat and press out the unwanted impressions or flaws, a grout touch up tool may also be used.

SUPER LIQUID RELEASE AGENT™ is formulated for use with most texturing mats. However, before use test a small area on the texturing mats to insure compatibility.

CAUTIONS:

Avoid contact with skin, eyes, inhalation, and ingestion. If skin contact is made, wash the effected area with soap and water

First Aid:


Eye Contact: In the event of contact with eyes, irrigate with water for at least ten minutes; obtain medical advice if irritation persists.

Skin Contact: Remove contaminated clothes. Wash affected area with water. If irritation persists obtain medical advice. Launder contaminated clothing before reuse.

Ingestion (Swallowing): If conscious give large quantities of milk if available, give water if milk is not available to reduce concentration. Never give anything by mouth to an unconscious person.

Inhalation: Remove to fresh air. Rest in a half upright position. Seek medical attention if necessary.

**NFPA Hazard Classifications of SUPER LIQUID RELEASE AGENT™
as Shipped by The Concrete Supply House LLC**

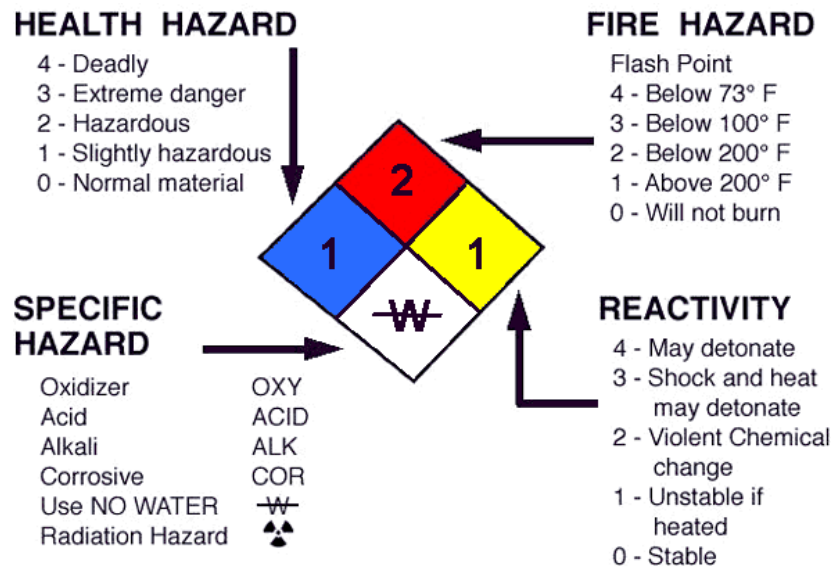

Shelf Life:

Shelf Life on SUPER LIQUID RELEASE AGENT™ is approximately 6 months to 1 year.

Storage:

Store product with cap tightly closed in well ventilated area when not in use. KEEP AWAY FROM HEAT AND FLAME!

Warranty:

The Concrete Supply House LLC warrants that their products conforms to the description and standards as stated on the product packaging (specific product literature in this instance). If properly applied, The Concrete Supply House LLC warrants the SUPER LIQUID RELEASE AGENT™ to be an effective bond breaker between concrete and stamping tools. If SUPER LIQUID RELEASE AGENT™ is found to be defective the exclusive remedy of the user or buyer and the limit of liability of The Concrete Supply House LLC shall be the purchase price paid by the user or buyer for the quantity of The Concrete Supply House LLC product involved. Because The Concrete Supply House LLC has no control over the workmanship or other materials used along with our products, we are not responsible for the finished jobs, methods used, and/or multiple color combinations.

KEEP OUT OF REACH OF CHILDREN!